SIEMENS

Data sheet

3RN2011-2BW30



Thermistor motor protection relay Standard evaluation unit 22.5 mm enclosure Spring-type terminal 2 change-over contacts US = 24 V-240 V AC/DC Manul/Remote-Reset with ATEX approval 2 LEDs (READY/TRIPPED) galvanic isolation Test/reset button Wire break monitoring Short circuit monitoring

product brand name	SIRIUS			
product category	SIRIUS 3RN2 thermistor motor protection			
product designation	Thermistor motor protection relay			
design of the product	Standard evaluation unit with ATEX approval, open-circuit and short-circuit detection in the sensor circuit			
product type designation	3RN2			
General technical data				
product function	thermistor motor protection			
display version LED	Yes			
power loss [W] for rated value of the current				
 at AC in hot operating state 	1.6 W			
 at DC in hot operating state 	1.6 W			
insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	300 V			
degree of pollution	3			
surge voltage resistance rated value	4 kV			
shock resistance according to IEC 60068-2-27	11g / 15 ms			
vibration resistance according to IEC 60068-2-6	10 55 Hz: 0.35 mm			
mechanical service life (operating cycles) typical	10 000 000			
electrical endurance (operating cycles) at AC-15 at 230 V typical	100 000			
thermal current of the switching element with contacts maximum	5 A			
reference code according to IEC 81346-2	К			
Substance Prohibitance (Date)	05/28/2009			
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8			
Weight	0.173 kg			
Product Function				
product function				
error memory	No			
 dynamic open-circuit detection 	Yes			
external reset	Yes			
auto-RESET	No			
manual RESET	Yes			
Control circuit/ Control				
type of voltage of the control supply voltage	AC/DC			
control supply voltage at AC				
• at 50 Hz rated value	24 240 V			
• at 60 Hz rated value	24 240 V			
control supply voltage at DC rated value	24 240 V			
operating range factor control supply voltage rated value at				

DC	
 initial value 	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 50 Hz	
initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
• initial value	0.85
full-scale value	1.1
inrush current peak	
• at 24 V	0.7 A
• at 240 V	12 A
duration of inrush current peak	
• at 24 V	0.25 ms
• at 240 V	0.2 ms
Measuring circuit	
buffering time in the event of power failure minimum	40 ms
Precision	
relative metering precision	2 %
Auxiliary circuit	
material of switching contacts	AgSnO2
	Ag5n02 0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	
number of CO contacts for auxiliary contacts	2
operational current of auxiliary contacts at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A
Main circuit	
operating frequency rated value	50 60 Hz
ampacity of the output relay at AC-15 at 250 V at 50/60 Hz	3 A
ampacity of the output relay at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
continuous current of the DIAZED fuse link of the output relay	6 A
Electromagnetic compatibility	
conducted interference	
 due to burst according to IEC 61000-4-4 	2 kV (power ports) / 1 kV (signal ports)
 due to conductor-earth surge according to IEC 61000-4-5 	
• due to conductor-cartin surge according to inco o robo-4-5	2 kV (line to ground)
due to conductor-conductor surge according to IEC 61000-4-5	2 kV (line to ground) 1 kV (line to line)
due to conductor-conductor surge according to IEC	
• due to conductor-conductor surge according to IEC 61000-4-5	1 kV (line to line)
due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2	1 kV (line to line)
• due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation	1 kV (line to line) 6 kV contact discharge / 8 kV air discharge
due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation	1 kV (line to line) 6 kV contact discharge / 8 kV air discharge
• due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation	1 kV (line to line) 6 kV contact discharge / 8 kV air discharge galvanic isolation
• due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output	1 kV (line to line) 6 kV contact discharge / 8 kV air discharge galvanic isolation Yes
• due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the outputs	1 kV (line to line) 6 kV contact discharge / 8 kV air discharge galvanic isolation Yes Yes
• due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation • between input and output • between the outputs • between the voltage supply and other circuits	1 kV (line to line) 6 kV contact discharge / 8 kV air discharge galvanic isolation Yes Yes
due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation between input and output between the outputs between the voltage supply and other circuits Safety related data	1 kV (line to line) 6 kV contact discharge / 8 kV air discharge galvanic isolation Yes Yes Yes
 due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation between input and output between the outputs between the voltage supply and other circuits Safety related data failure rate [FIT] at rate of recognizable hazardous failures (Add) 	1 kV (line to line) 6 kV contact discharge / 8 kV air discharge galvanic isolation Yes Yes Yes 6.8E-8 1/h
 due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation between input and output between the outputs between the voltage supply and other circuits Safety related data failure rate [FIT] at rate of recognizable hazardous failures (Add) failure rate [FIT] at rate of non-recognizable hazardous 	1 kV (line to line) 6 kV contact discharge / 8 kV air discharge galvanic isolation Yes Yes Yes 6.8E-8 1/h
 due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation between input and output between the outputs between the voltage supply and other circuits Safety related data failure rate [FIT] at rate of recognizable hazardous failures (Adu) failures (Adu) 	1 kV (line to line) 6 kV contact discharge / 8 kV air discharge galvanic isolation Yes Yes Yes 6.8E-8 1/h 3.08E-7 1/h
 due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation between input and output between the outputs between the voltage supply and other circuits Safety related data failure rate [FIT] at rate of recognizable hazardous failures (Adu) failures (Adu) average diagnostic coverage level (DCavg) 	1 kV (line to line) 6 kV contact discharge / 8 kV air discharge galvanic isolation Yes Yes Yes 6.8E-8 1/h 3.08E-7 1/h 18 %
 due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation between input and output between the outputs between the voltage supply and other circuits Safety related data failure rate [FIT] at rate of recognizable hazardous failures (Adu) failures (Adu) average diagnostic coverage level (DCavg) MTBF 	1 kV (line to line) 6 kV contact discharge / 8 kV air discharge galvanic isolation Yes Yes Yes 6.8E-8 1/h 3.08E-7 1/h 18 % 97 a
 due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation between input and output between the outputs between the voltage supply and other circuits Safety related data failure rate [FIT] at rate of recognizable hazardous failures (\lambda du) average diagnostic coverage level (DCavg) MTBF MTTFd 	1 kV (line to line) 6 kV contact discharge / 8 kV air discharge galvanic isolation Yes Yes Yes 6.8E-8 1/h 3.08E-7 1/h 18 % 97 a
 due to conductor-conductor surge according to IEC 61000-4-5 electrostatic discharge according to IEC 61000-4-2 Galvanic isolation design of the electrical isolation galvanic isolation between input and output between the outputs between the voltage supply and other circuits Safety related data failure rate [FIT] at rate of recognizable hazardous failures (Add) failure rate [FIT] at rate of non-recognizable hazardous failures (Adu) average diagnostic coverage level (DCavg) MTBF MTTFd IEC 62061 	1 kV (line to line) 6 kV contact discharge / 8 kV air discharge galvanic isolation Yes Yes Yes 6.8E-8 1/h 3.08E-7 1/h 18 % 97 a 303 a

100 100 10	
ISO 13849	
performance level (PL) according to EN ISO 13849-1	PL c
category according to EN ISO 13849-1	1
performance level (PL) according to ISO 13849-1	PL c
IEC 61508	
Safety Integrity Level (SIL) according to IEC 61508	1
safety device type according to IEC 61508-2	Туре В
PFDavg with low demand rate according to IEC 61508	0.0041
Safe failure fraction (SFF)	74 %
hardware fault tolerance according to IEC 61508	0
T1 value for proof test interval or service life according to IEC 61508	3 a
Connections/ Terminals	
product component removable terminal for auxiliary and	Yes
control circuit	
type of electrical connection	spring-loaded terminal (push-in)
 for auxiliary and control circuit 	spring-loaded terminals (push-in)
type of connectable conductor cross-sections	
• solid	0.5 4 mm²
 finely stranded with core end processing 	0.5 2.5 mm²
• finely stranded without core end processing	0.5 4 mm²
for AWG cables solid	20 12
 for AWG cables stranded 	20 12
connectable conductor cross-section	
• solid	0.5 4 mm²
 finely stranded with core end processing 	0.5 2.5 mm²
 finely stranded without core end processing 	0.5 4 mm²
AWG number as coded connectable conductor cross	
section	
• solid	20 12
stranded	20 12
Installation/ mounting/ dimensions	
installation/ mounting/ unitensions	
mounting position	any
	any screw and snap-on mounting onto 35 mm DIN rail
mounting position	
mounting position fastening method	screw and snap-on mounting onto 35 mm DIN rail
mounting position fastening method height width depth	screw and snap-on mounting onto 35 mm DIN rail 100 mm
mounting position fastening method height width	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm
mounting position fastening method height width depth	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm
mounting position fastening method height width depth required spacing	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — at the side • for grounded parts	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — at the side • for grounded parts — backwards — backwards	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - at the side • for grounded parts - forwards - backwards - upwards	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — at the side • for grounded parts — backwards — upwards — at the side — forwards — upwards — at the side — forwards — upwards — at the side	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — at the side • for grounded parts — forwards — upwards — at the side — forwards — upwards — downwards — downwards — downwards — downwards — downwards — downwards — upwards — downwards	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - downwards - at the side • for grounded parts - forwards - backwards - at the side - forwards - backwards - ownwards - backwards - ownwards - forwards - forwards - height - forwards - height - height - wards - height - ownwards - height - height	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side • for grounded parts — forwards — backwards — upwards — forwards — forwards — forwards — loackwards — forwards — forwards — forwards — upwards — odownwards • for live parts — forwards	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - at the side • for grounded parts - forwards - backwards - at the side • for grounded parts - forwards - at the side - ownwards - at the side - ownwards - at the side - downwards - backwards - backwards - backwards	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - downwards - at the side • for grounded parts - forwards - backwards - upwards - backwards - backwards - backwards - backwards - upwards - at the side - downwards • for live parts - forwards - upwards - backwards - upwards - backwards - upwards - backwards - upwards - downwards - at the side	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - downwards - at the side • for grounded parts - forwards - backwards - upwards - forwards - backwards - backwards - upwards - backwards - upwards - at the side - downwards • for live parts - forwards - backwards - upwards - downwards	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - downwards - at the side • for grounded parts - forwards - backwards - upwards - backwards - backwards - backwards - backwards - upwards - at the side - downwards • for live parts - forwards - upwards - backwards - upwards - backwards - upwards - backwards - upwards - downwards - at the side	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - downwards - at the side • for grounded parts - forwards - backwards - upwards - backwards - forwards - backwards - upwards - forwards - backwards - upwards - at the side - downwards • for live parts - forwards - backwards - upwards - at the side - downwards - at the side - downwards - at the side - downwards - at the side - at the side	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - at the side • for grounded parts - forwards - backwards - at the side • for grounded parts - forwards - backwards - upwards - backwards - upwards - at the side - downwards • for live parts - forwards - backwards - upwards - backwards - upwards - backwards - upwards - backwards - upwards - downwards - at the side Ambient conditions installation altitude at height above sea level maximum	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm
mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - downwards - at the side • for grounded parts - forwards - backwards - upwards - at the side • for grounded parts - forwards - backwards - upwards - backwards - upwards - at the side - downwards • for live parts - forwards - backwards - upwards - downwards - at the side Ambient conditions installation altitude at height above sea level maximum ambient temperature	screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 2 000 m 2 000 m

 during transport 		-40	. +85 °C			
	ty during operation maximum		70 %			
	etion category for dust [Ex t] [Ex p]		[Ex p]			
explosion protection	otection category for gas [Ex e] [Ex d] [Ex px]					
Approvals Certificates						
General Product App	proval					
	CE EG-Konf.	UK CA	Confirmation		EHC	
EMV	For use in hazardou	s locations	Test Certificates	Marine / Shipping		
RCM	Ex ATEX	τΰν	<u>Type Test Certific-</u> ates/Test Report		Lloyd's Register uts	
Marine / Shipping	other	Environment				

Further information

Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RN2011-2BW30

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RN2011-2BW30


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RN2011-2BW30

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RN2011-2BW30&lang=en

Characteristic: Derating

https://support.industry.siemens.com/cs/ww/en/ps/3RN2011-2BW30/manual

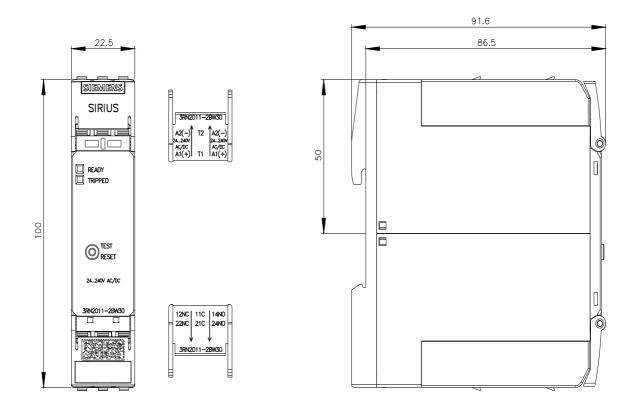

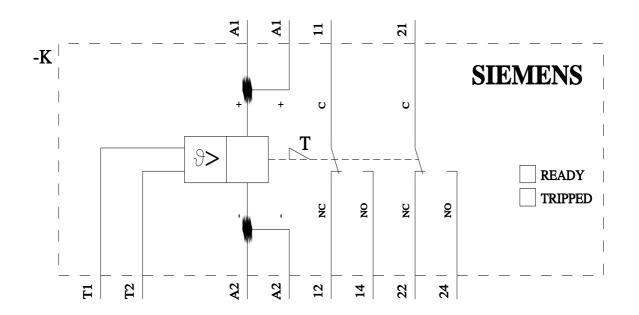

last modified:

12/10/2024 🖸

1/9/2025