

!!! Phased-out product !!! The preferred successor is 3RN2010-2CA30 Thermistor motor protection Standard evaluation unit AUTO, 1 NO + 1 NC, 24 V AC/DC Spring-type terminal

General technical data	
display version LED	Yes
reference code according to IEC 81346-2	K
Substance Prohibitance (Date)	05/28/2009
SVHC substance name	Lead monoxide (lead oxide) - 1317-36-8
Weight	0.122 kg
Product Function	
product function reclosing lockout	No
Control circuit/ Control	
control supply voltage 1 at AC	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
control supply voltage 1 at DC rated value	24 V
Auxiliary circuit	
supply voltage frequency	
• 1 for auxiliary and control circuit rated value	50 Hz
• 2 for auxiliary and control circuit rated value	60 Hz
number of NC contacts for auxiliary contacts	1
number of NO contacts for auxiliary contacts	1
number of CO contacts for auxiliary contacts	0
Main circuit	
type of voltage	AC/DC
Connections/ Terminals	
type of electrical connection for auxiliary and control circuit	spring-loaded terminals
Installation/ mounting/ dimensions	
fastening method	screw and snap-on mounting
height	94 mm
width	22.5 mm
depth	91 mm
Ambient conditions	
ambient temperature during operation	-25 ... +60 °C
Approvals Certificates	
General Product Approval	EMV



[Confirmation](#)



EMV	For use in hazardous locations	Test Certificates	other	Environment
-----	--------------------------------	-------------------	-------	-------------

[KC](#)



[Type Test Certificates/Test Report](#)

[Confirmation](#)

[Miscellaneous](#)

[Environmental Confirmations](#)

### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mifb=3RN1010-2CB00>

Cax online generator

<http://support.automation.siemens.com/WWW/CAXorder/default.aspx?lang=en&mifb=3RN1010-2CB00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RN1010-2CB00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mifb=3RN1010-2CB00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mifb=3RN1010-2CB00&lang=en)

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RN1010-2CB00/manual>

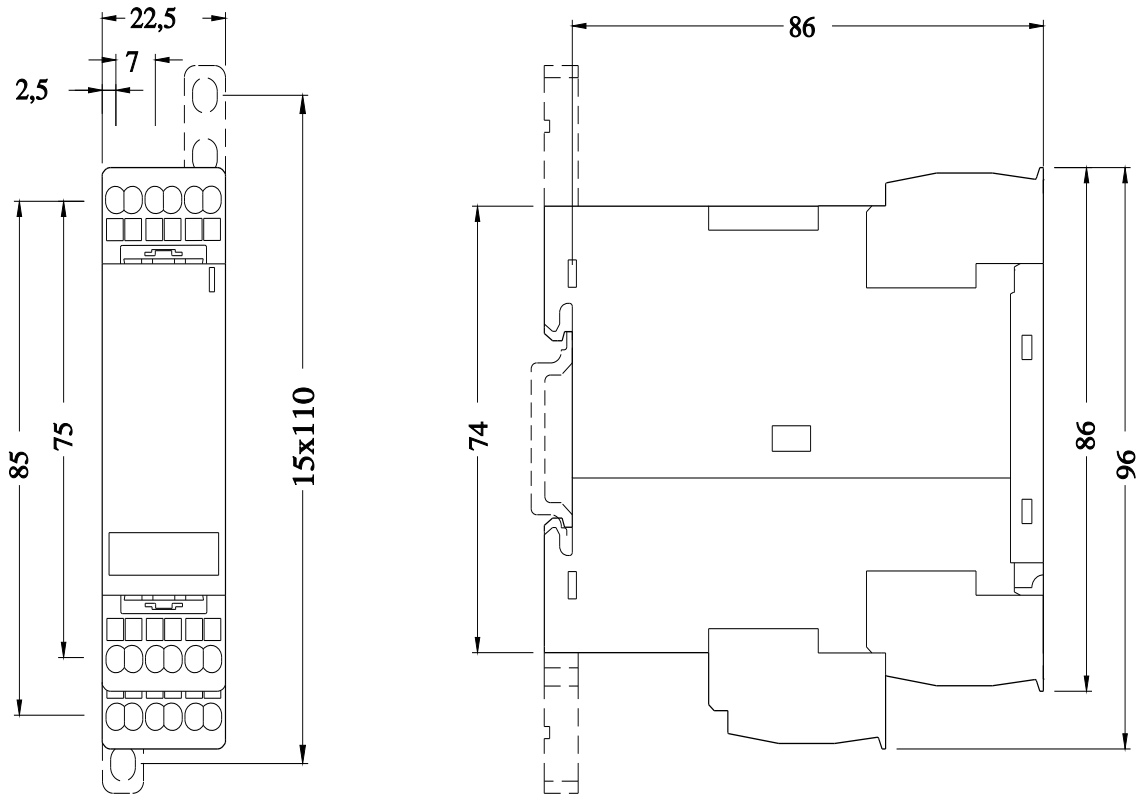

last modified:

3/11/2024 