



Thermistor motor protection relay Compact evaluation unit 17.5 mm enclosure, screw terminals, 1 changeover contact, US = 24 V AC/DC, Auto RESET, suitable for bimetallic switch, supply =output voltage, 1 LED (tripped)

| | |
|---|--|
| product brand name | SIRIUS |
| product category | SIRIUS 3RN2 thermistor motor protection |
| product designation | Thermistor motor protection relay |
| design of the product | Compact evaluation unit, suitable for bimetallic switch (terminal A1 jumpered with root of changeover contact) |
| product type designation | 3RN2 |
| General technical data | |
| product function | thermistor motor protection |
| display version LED | Yes |
| power loss [W] for rated value of the current | |
| • at AC in hot operating state | 0.3 W |
| • at DC in hot operating state | 0.3 W |
| insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value | 300 V |
| degree of pollution | 3 |
| surge voltage resistance rated value | 4 kV |
| shock resistance according to IEC 60068-2-27 | 11g / 15 ms |
| vibration resistance according to IEC 60068-2-6 | 10 ... 55 Hz: 0.35 mm |
| mechanical service life (operating cycles) typical | 10 000 000 |
| electrical endurance (operating cycles) at AC-15 at 230 V typical | 100 000 |
| thermal current of the switching element with contacts maximum | 5 A |
| reference code according to IEC 81346-2 | K |
| Substance Prohibitance (Date) | 05/28/2009 |
| SVHC substance name | Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 |
| Weight | 0.13 kg |
| Product Function | |
| product function | |
| • error memory | No |
| • dynamic open-circuit detection | No |
| • external reset | No |
| • auto-RESET | Yes |
| • manual RESET | No |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage at AC | |
| • at 50 Hz rated value | 24 ... 24 V |
| • at 60 Hz rated value | 24 ... 24 V |
| control supply voltage at DC rated value | 24 ... 24 V |
| operating range factor control supply voltage rated value at | |

| | |
|---|--|
| DC | |
| <ul style="list-style-type: none"> initial value full-scale value | 0.85 1.1 |
| operating range factor control supply voltage rated value at AC at 50 Hz | |
| <ul style="list-style-type: none"> initial value full-scale value | 0.85 1.1 |
| operating range factor control supply voltage rated value at AC at 60 Hz | |
| <ul style="list-style-type: none"> initial value full-scale value | 0.85 1.1 |
| inrush current peak | |
| <ul style="list-style-type: none"> at 24 V | 1.8 A |
| duration of inrush current peak | |
| <ul style="list-style-type: none"> at 24 V | 2 ms |
| Measuring circuit | |
| buffering time in the event of power failure minimum | 40 ms |
| Precision | |
| relative metering precision | 9 % |
| Auxiliary circuit | |
| material of switching contacts | AgSnO2 |
| number of NC contacts for auxiliary contacts | 0 |
| number of NO contacts for auxiliary contacts | 0 |
| number of CO contacts for auxiliary contacts | 1 |
| operational current of auxiliary contacts at DC-13 | |
| <ul style="list-style-type: none"> at 24 V | 1 A |
| Main circuit | |
| operating frequency rated value | 50 ... 60 Hz |
| ampacity of the output relay at AC-15 at 250 V at 50/60 Hz | 3 A |
| ampacity of the output relay at DC-13 | |
| <ul style="list-style-type: none"> at 24 V | 1 A |
| continuous current of the DIAZED fuse link of the output relay | 6 A |
| Electromagnetic compatibility | |
| conducted interference | |
| <ul style="list-style-type: none"> due to burst according to IEC 61000-4-4 due to conductor-earth surge according to IEC 61000-4-5 due to conductor-conductor surge according to IEC 61000-4-5 | 2 kV (power ports) / 1 kV (signal ports) 2 kV (line to ground) 1 kV (line to line) |
| electrostatic discharge according to IEC 61000-4-2 | 6 kV contact discharge / 8 kV air discharge |
| Galvanic isolation | |
| design of the electrical isolation | without galvanic isolation |
| galvanic isolation | |
| <ul style="list-style-type: none"> between input and output between the voltage supply and other circuits | No No |
| Connections/ Terminals | |
| product component removable terminal for auxiliary and control circuit | Yes |
| type of electrical connection | screw terminal |
| <ul style="list-style-type: none"> for auxiliary and control circuit | screw-type terminals |
| type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> solid finely stranded with core end processing for AWG cables solid | 1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²) 1x (0.5 ... 4 mm ²), 2x (0.5 ... 1.5 mm ²) 1x (20 ... 12), 2x (20 ... 14) |
| connectable conductor cross-section | |
| <ul style="list-style-type: none"> solid finely stranded with core end processing | 0.5 ... 4 mm ² 0.5 ... 4 mm ² |
| AWG number as coded connectable conductor cross section | |
| <ul style="list-style-type: none"> solid stranded | 20 ... 12 20 ... 12 |
| tightening torque with screw-type terminals | 0.6 ... 0.8 N·m |

| Installation/ mounting/ dimensions | |
|---|--|
| mounting position | any |
| fastening method | screw and snap-on mounting onto 35 mm DIN rail |
| height | 100 mm |
| width | 17.5 mm |
| depth | 90 mm |
| required spacing | |
| <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards 0 mm — backwards 0 mm — upwards 0 mm — downwards 0 mm — at the side 0 mm • for grounded parts <ul style="list-style-type: none"> — forwards 0 mm — backwards 0 mm — upwards 0 mm — at the side 0 mm — downwards 0 mm • for live parts <ul style="list-style-type: none"> — forwards 0 mm — backwards 0 mm — upwards 0 mm — downwards 0 mm — at the side 0 mm | |

| Ambient conditions | |
|---|---------|
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| <ul style="list-style-type: none"> • during operation -25 ... +60 °C • during storage -40 ... +85 °C • during transport -40 ... +85 °C | |
| relative humidity during operation maximum | 70 % |

Approvals Certificates

General Product Approval



[Confirmation](#)



| EMV | Test Certificates | Marine / Shipping | other |
|-----|--|-------------------|------------------------------|
| | Type Test Certificates/Test Report | | |
| | | | Confirmation |

Environment

[Environmental Confirmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RN2000-1AA30>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RN2000-1AA30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RN2000-1AA30>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RN2000-1AA30&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RN2000-1AA30/manual>

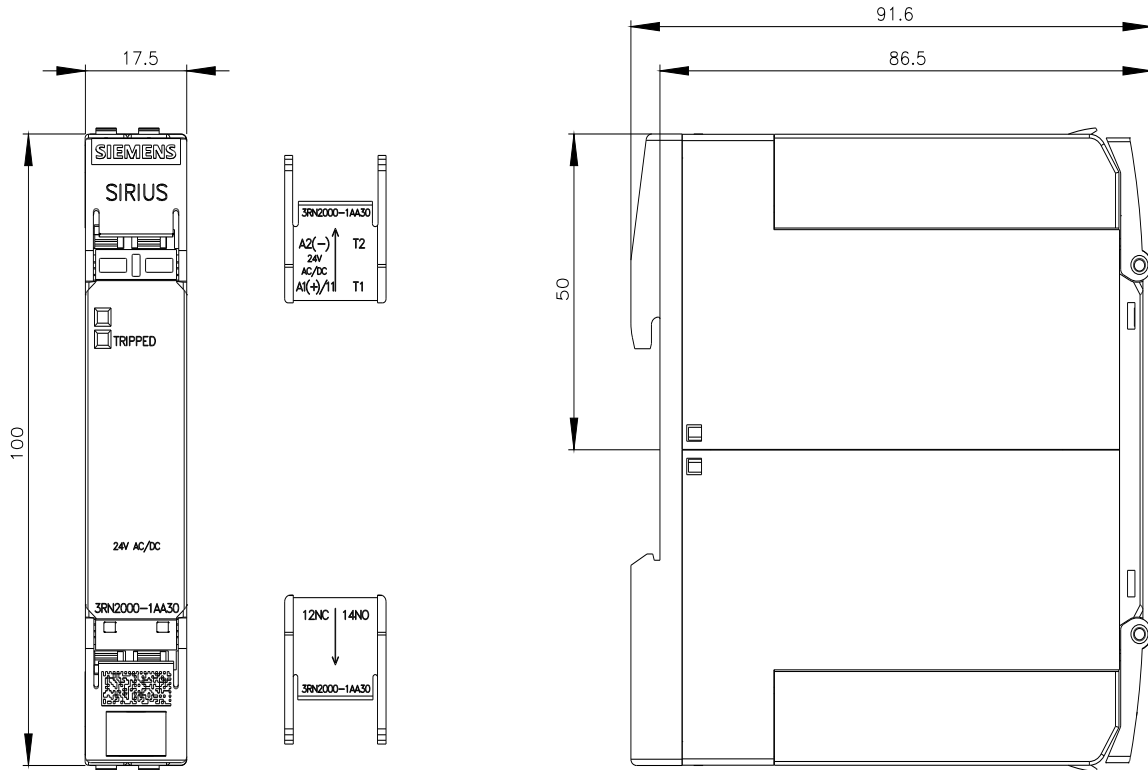

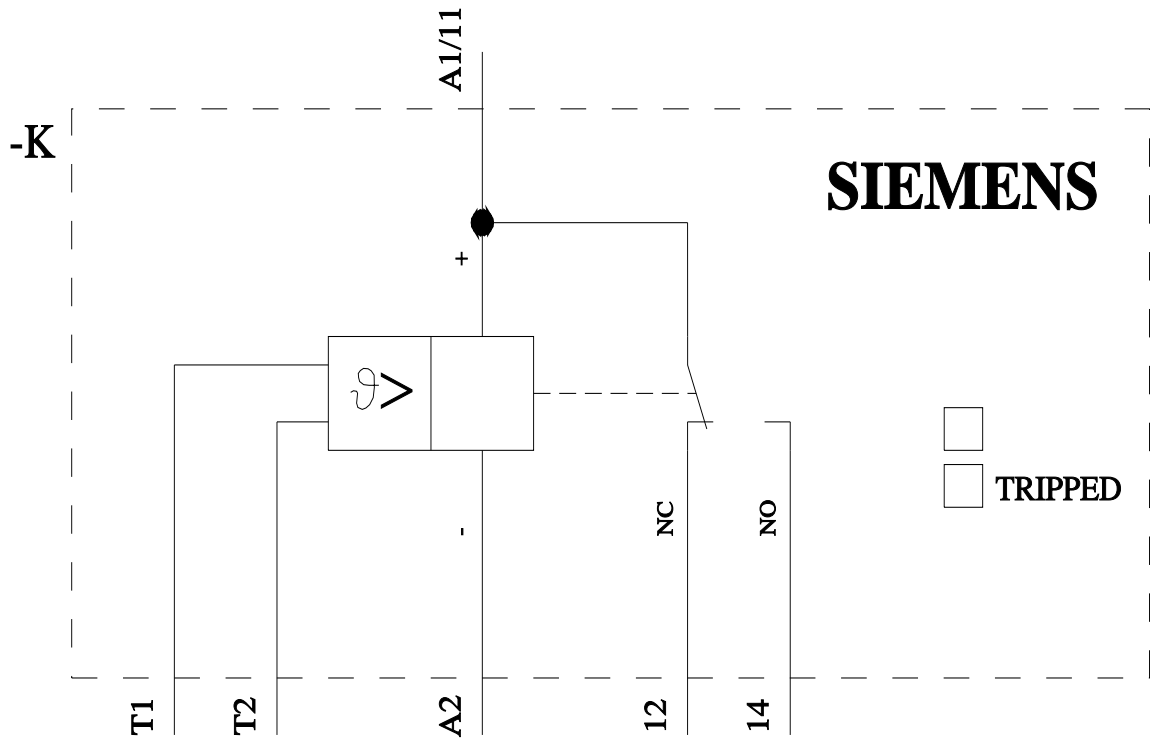

last modified:

12/10/2024 