



Timing relay, multifunction 1 changeover contact, 2 functions (B, K) 7 time ranges (0.05 s...100 h) 24 V AC/DC at 50/60 Hz AC With LED, screw terminal

product brand name	SIRIUS
product designation	timing relay
design of the product	2 functions (B, K)
product type designation	3RP25

General technical data

adjustable time	0.05 s ... 100 h
Substance Prohibitance (Date)	09/12/2014
Weight	0.142 kg

Electromagnetic compatibility

EMC emitted interference according to IEC 61812-1	ambience A (industrial sector)
EMC immunity according to IEC 61812-1	corresponds to degree of severity 3

Electrical Safety

protection class IP on the front according to IEC 60529	IP20
---------------------------------------------------------	------

Approvals Certificates

General Product Approval



[Confirmation](#)



EMV Test Certificates Marine / Shipping



[KC](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping other Environment



[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
 Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>
 Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RP2505-1AB30-0AC1>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP2505-1AB30-0AC1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RP2505-1AB30-0AC1>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RP2505-1AB30-0AC1&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RP2505-1AB30-0AC1/manual>

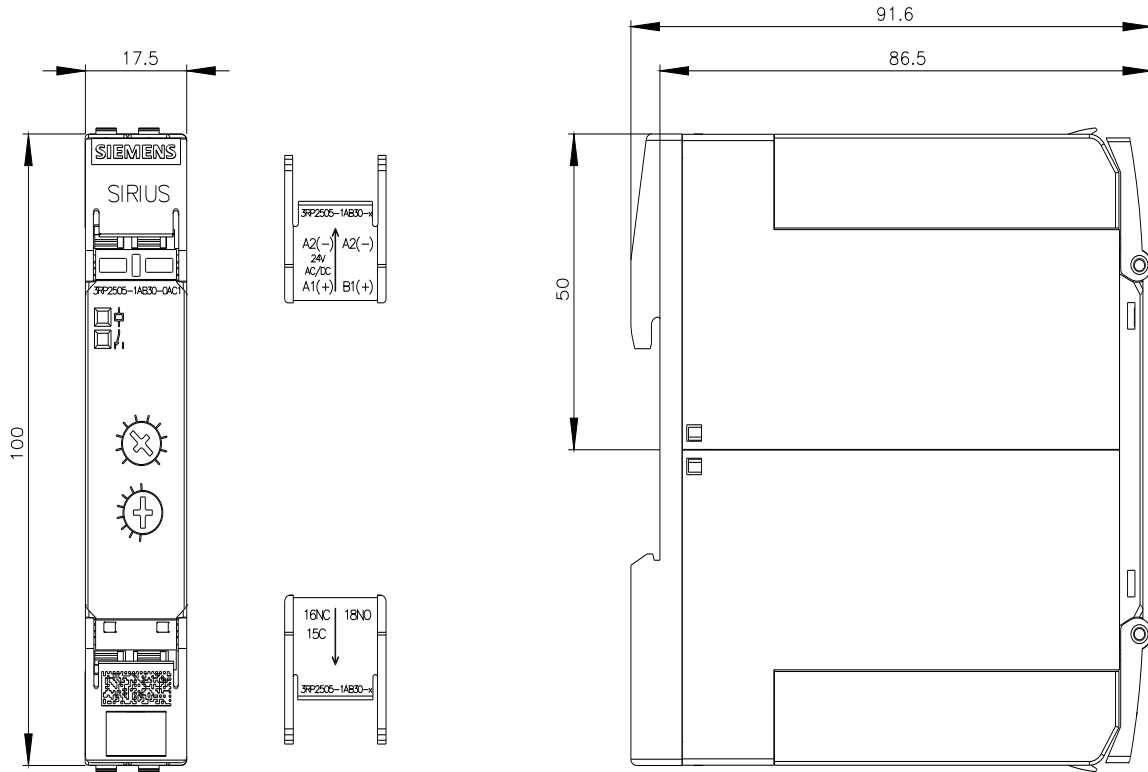

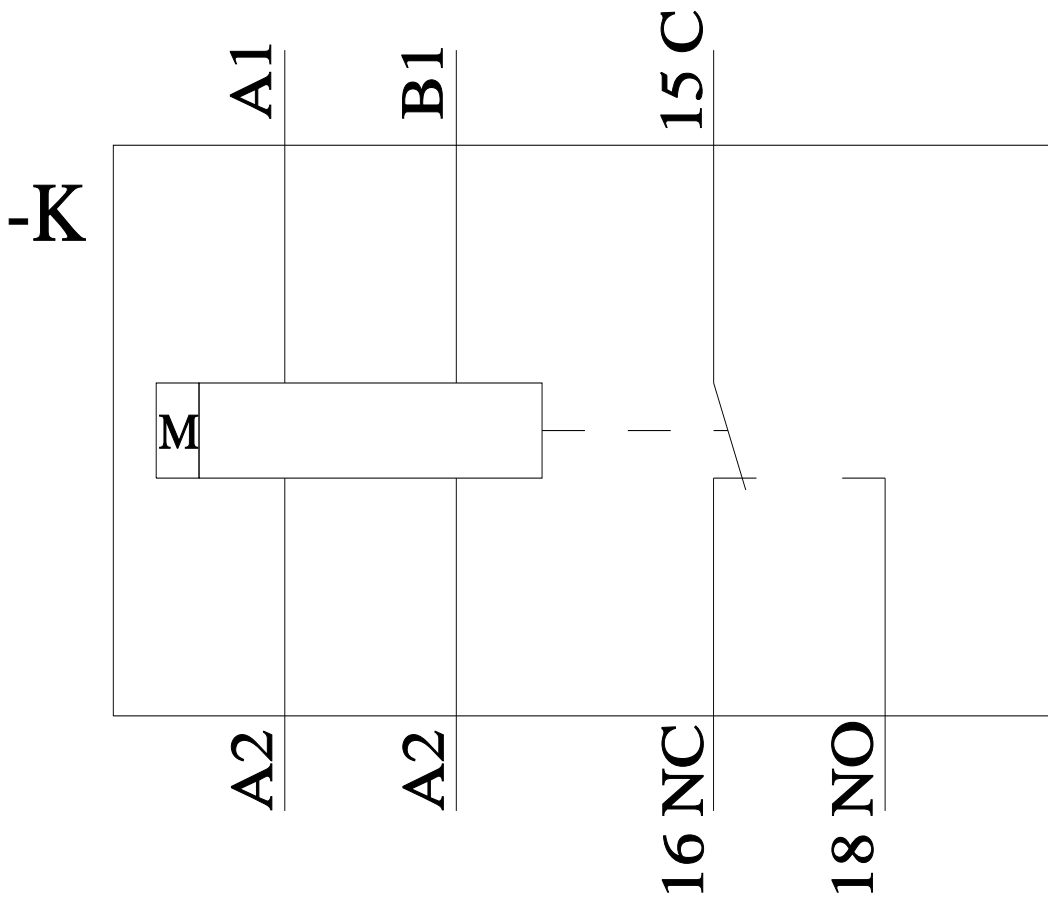

last modified:

4/9/2024 