

# Product data sheet

Specifications



## TeSys F contactor - 3P (3 NO) - AC-3 - <= 440 V 630 A - coil 110 V AC

LC1F630F7

⚠ Discontinued on: Jun 15, 2023

⚠ Discontinued

Product availability: Stock - Normally stocked in distribution facility

### Main

|                                |   |
|--------------------------------|---|
| Range                          | TeSys   |
| Range of Product               | TeSys F   |
| Product or Component Type      | Contactor   |
| Device short name              | LC1F  |
| Contactor application          | Resistive load<br>Motor control   |
| Utilisation category           | AC-4<br>AC-1<br>AC-3  |
| Poles description              | 3P  |
| [Ue] rated operational voltage | <= 1000 V AC 50/60 Hz<br><= 460 V DC  |
| [Uc] control circuit voltage   | 110 V AC 40...400 Hz  |
| [Ie] rated operational current | 1000 A (at <104 °F (40 °C)) at <= 440 V AC AC-1<br>630 A (at <131 °F (55 °C)) at <= 440 V AC AC-3 |

### Complementary

|   |  |
|---|--|
| [Uimp] rated impulse withstand voltage      | 8 kV   |
| [Ith] conventional free air thermal current | 1000 A (at 104 °F (40 °C))<br>1250 A   |
| Rated breaking capacity                     | 5040 A conforming to IEC 60947-4-1   |
| [Icw] rated short-time withstand current    | 5050 A 104 °F (40 °C) - 10 s<br>4400 A 104 °F (40 °C) - 30 s<br>3400 A 104 °F (40 °C) - 1 min<br>2200 A 104 °F (40 °C) - 3 min<br>1600 A 104 °F (40 °C) - 10 min |
| Associated fuse rating                      | 1000 A gG at <= 440 V<br>630 A aM at <= 440 V  |
| Average impedance                           | 0.12 mOhm - Ith 1000 A 50 Hz   |
| [Ui] rated insulation voltage               | 1000 V IEC 60947-4-1<br>1500 V VDE 0110 group C  |
| Power dissipation per pole                  | 120 W AC-1<br>48 W AC-3  |
| overvoltage category                        | III  |
| power pole contact composition              | 3 NO   |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                                 |  |
|---------------------------------|--|
| Motor power kW                  | 335 kW at 380...400 V AC 50/60 Hz (AC-3)<br>375 kW at 415 V AC 50/60 Hz (AC-3)<br>400 kW at 440 V AC 50/60 Hz (AC-3)<br>400 kW at 500 V AC 50/60 Hz (AC-3)<br>450 kW at 660...690 V AC 50/60 Hz (AC-3)<br>450 kW at 1000 V AC 50/60 Hz (AC-3)<br>200 kW at 220...230 V AC 50/60 Hz (AC-3)<br>100 kW at 400 V AC 50/60 Hz (AC-4)  |
| Control circuit voltage limits  | Operational 0.85...1.1 Uc 40...400 Hz 131 °F (55 °C))<br>Drop-out 0.25...0.5 Uc 40...400 Hz 131 °F (55 °C))  |
| Mechanical durability           | 5 Mcycles  |
| Inrush power in VA              | 1650 VA, 40...400 Hz 0.9 68 °F (20 °C))  |
| Hold-in power consumption in VA | 22 VA, 40...400 Hz 0.9 68 °F (20 °C))  |
| Maximum operating rate          | 1200 cyc/h 131 °F (55 °C)  |
| Operating time                  | 40...80 ms closing<br>100...200 ms opening   |
| Connections - terminals         | Control circuit screw clamp terminals 1 0.002...0.006 in² (1...4 mm²)flexible without cable end<br>Control circuit screw clamp terminals 2 0.002...0.006 in² (1...4 mm²)flexible without cable end<br>Control circuit screw clamp terminals 1 0.002...0.006 in² (1...4 mm²)flexible with cable end<br>Control circuit screw clamp terminals 2 0.002...0.004 in² (1...2.5 mm²)flexible with cable end<br>Control circuit screw clamp terminals 1 0.002...0.006 in² (1...4 mm²)solid without cable end<br>Control circuit screw clamp terminals 2 0.002...0.006 in² (1...4 mm²)solid without cable end<br>Power circuit bar 2 60 x 5 mm<br>Power circuit bolted connection |
| Tightening torque               | Control circuit 10.6 lbf.in (1.2 N.m)<br>Power circuit 513.3 lbf.in (58 N.m)   |
| Mounting Support                | Plate  |
| Heat dissipation                | 20 W   |
| motor power range               | 250...500 kW 380...440 V 3 phase<br>110...220 kW 200...240 V 3 phase<br>250...500 kW 480...500 V 3 phase   |
| Motor starter type              | Direct on-line contactor   |
| Contactor coil voltage          | 110 V AC standard<br>120 V AC standard   |
| Standards                       | IEC 60947-1<br>JIS C8201-4-1<br>EN 60947-1<br>IEC 60947-4-1<br>EN 60947-4-1  |
| Product Certifications          | CSA<br>BV<br>CB<br>RMRoS<br>LROS (Lloyds register of shipping)<br>ABS<br>UL<br>RINA<br>DNV<br>UKCA   |
| Compatibility code              | LC1F   |
| Control circuit type            | AC 40...400 Hz   |

## Environment

|                         |   |
|-------------------------|---|
| IP degree of protection | IP20 front face with shrouds IEC 60529<br>IP20 front face with shrouds VDE 0106 |
|-------------------------|---|

|   |                                      |
|---|--------------------------------------|
| Protective treatment                                  | TH                                   |
| Ambient air temperature for operation                 | 23...131 °F (-5...55 °C)             |
| Ambient Air Temperature for Storage                   | -76...176 °F (-60...80 °C)           |
| Permissible ambient air temperature around the device | -40...158 °F (-40...70 °C)           |
| Height  | 12.0 in (304 mm)                     |
| Width   | 12.2 in (309 mm)                     |
| Depth   | 10.04 in (255 mm)                    |
| Operating altitude                                    | 9842.52 ft (3000 m) without derating |
| Product Weight  | 41.006 lb(US) (18.6 kg)              |

## Ordering and shipping details

|                   |               |
|-------------------|---------------|
| Category          | US10I1222336  |
| Discount Schedule | 0I12          |
| GTIN              | 3389110227130 |
| Returnability     | Yes           |
| Country of origin | CZ            |

## Packing Units

|                              |                          |
|------------------------------|--------------------------|
| Unit Type of Package 1       | PCE                      |
| Number of Units in Package 1 | 1                        |
| Package 1 Height             | 11.42 in (29.0 cm)       |
| Package 1 Width              | 13.78 in (35.0 cm)       |
| Package 1 Length             | 14.17 in (36.0 cm)       |
| Package 1 Weight             | 40.6 lb(US) (18.4 kg)    |
| Unit Type of Package 2       | P06                      |
| Number of Units in Package 2 | 4                        |
| Package 2 Height             | 30.31 in (77.0 cm)       |
| Package 2 Width              | 31.50 in (80.0 cm)       |
| Package 2 Length             | 23.62 in (60.0 cm)       |
| Package 2 Weight             | 176.46 lb(US) (80.04 kg) |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)


[How we assess product sustainability >](#)

| Environmental footprint                        |   |
|--|---|
| Carbon footprint (kg CO2 eq, Total Life cycle) | 4437  |
| Environmental Disclosure                       | <a href="#">Product Environmental Profile</a> |

Use Better

| Materials and Substances               |   |
|--|---|
| Packaging made with recycled cardboard | No  |
| Packaging without single use plastic   | No  |
| EU RoHS Directive                      | Compliant with Exemptions   |
| REACH Regulation                       | <a href="#">REACH Declaration</a>   |
| China RoHS Regulation                  | <a href="#">China RoHS declaration</a>  |
| California proposition 65              | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |


Use Again

| Repack and remanufacture |  |
|--------------------------|--|
| Circularity Profile      | <a href="#">End of Life Information</a>  |
| WEEE                     |  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |
| Take-back                | No   |


Dimensions Drawings

Dimensions and Drawings

LC1 F630 and F800

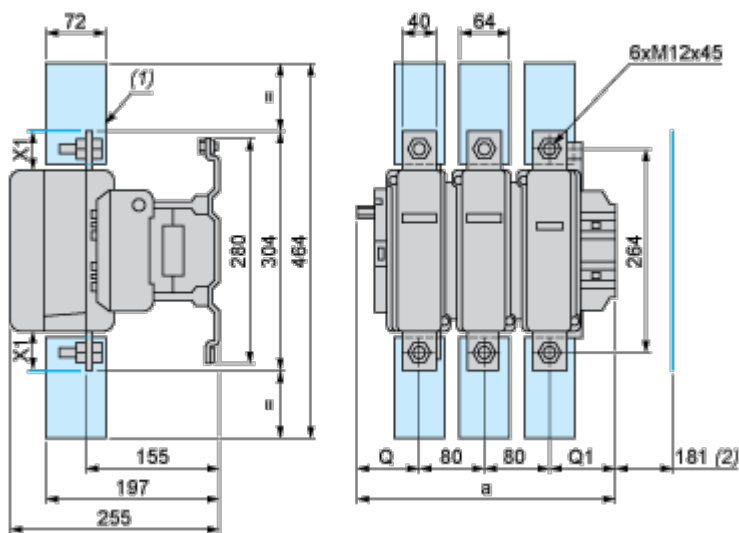

- (1) Power terminal protection shroud.
- (2) Minimum distance required for coil removal.




**NOTE:** X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.

| LC1        |    | a   | G supplied | G min. | G max. | J1   | Q   | Q1  |
|------------|----|-----|------------|--------|--------|------|-----|-----|
| F630       | 2P | 309 | 180        | 100    | 195    | 68.5 | 102 | 127 |
| F630, F800 | 3P | 309 | 180        | 100    | 195    | 68.5 | 60  | 89  |
| F630       | 4P | 389 | 240        | 150    | 275    | 88.5 | 60  | 89  |

| Voltage  | 200...500 V | 690...1000 V | 200...690 V | 1000 V |
|----------|-------------|--------------|-------------|--------|
| LC1 F630 | 20          | 30           | –           | –      |

**LC1F630F7**

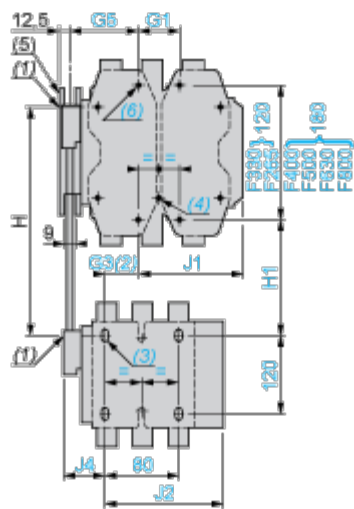

- (4) 4 x Ø6.5 for LC1 F265.
- (5) Mechanical interlock guide bracket.

Assembly B<sup>(7)</sup> - Mechanical interlock reference

|          | G1 3P | G1 4P | G3 3P | G3 4P | G5 3P | G5 4P | H min. | H max. |
|----------|-------|-------|-------|-------|-------|-------|--------|--------|
| LA9 FH4F | 96    | 96    | 21    | 27    | 60    | 83    | 240    | 380    |
| LA9 FJ4F | 80    | 80    | 45    | 26    | 83    | 83    | 250    | 380    |
| LA9 FK4F | 80    | 140   | 45    | 26    | 83    | 83    | 270    | 380    |
| LA9 FL4F | 180   | 240   | 35    | 17    | 74    | 74    | 310    | 380    |
| LA9 FH4G | 96    | 96    | 19    | 23    | 60    | 83    | 250    | 380    |
| LA9 FJ4G | 80    | 80    | 42    | 22    | 83    | 83    | 250    | 380    |
| LA9 FK4G | 80    | 140   | 42    | 22    | 83    | 83    | 270    | 380    |
| LA9 FL4G | 180   | 240   | 33    | 13    | 74    | 74    | 310    | 380    |


|          | H1 min. | H1 max. | J1 3P | J1 4P | J2 3P | J2 4P | J4 3P | J4 4P |
|----------|---------|---------|-------|-------|-------|-------|-------|-------|
| LA9 FH4F | 110     | 250     | 157.5 | 181.5 | 137   | 155.5 | 48.5  | 67    |
| LA9 FJ4F | 80      | 210     | 144.5 | 192.5 | 137   | 155.5 | 48.5  | 67    |
| LA9 FK4F | 100     | 210     | 164.5 | 219.5 | 137   | 155.5 | 48.5  | 67    |
| LA9 FL4F | 140     | 210     | 248.5 | 328.5 | 137   | 155.5 | 48.5  | 67    |
| LA9 FH4G | 120     | 250     | 157.5 | 181.5 | 139.5 | 159.5 | 53    | 73    |
| LA9 FJ4G | 90      | 220     | 144.5 | 192.5 | 139.5 | 159.5 | 53    | 73    |
| LA9 FK4G | 110     | 220     | 164.5 | 219.5 | 139.5 | 159.5 | 53    | 73    |

Product data sheet


LC1F630F7

|          | H1 min. | H1 max. | J1 3P | J1 4P | J2 3P | J2 4P | J4 3P | J4 4P |
|----------|---------|---------|-------|-------|-------|-------|-------|-------|
| LA9 FL4G | 150     | 220     | 248.5 | 328.5 | 139.5 | 159.5 | 53    | 73    |

Assembly C

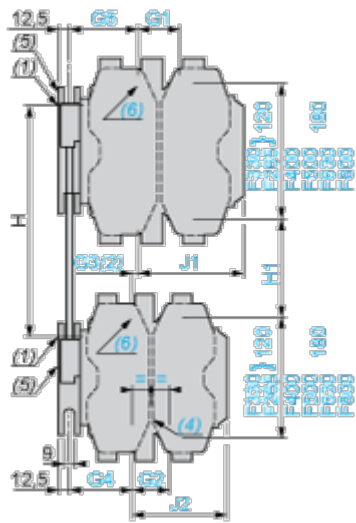

(6) 4 x Ø8.5 for LC1 F400, F500 or 4 x Ø10.5 for LC1 F630 and F800.

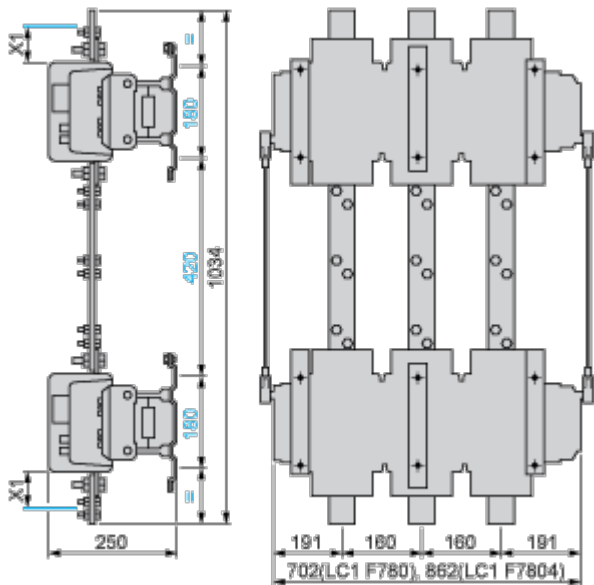

- (7) Only 3P for F800.
- (8) In this case, G4 is greater than G5.

Assembly C<sup>(7)</sup>

|          | G1 3P | G1 4P | G2 3P | G2 4P | G3 3P | G3 4P | G4 3P | G4 4P | G5 3P | G5 4P |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| LA9 FH4H | 96    | 96    | 96    | 96    | 0     | 0     | 60    | 83    | 60    | 83    |
| LA9 FJ4H | 80    | 80    | 96    | 96    | 23    | 0     | 60    | 83    | 83    | 83    |
| LA9 FK4H | 80    | 140   | 96    | 96    | 23    | 0     | 60    | 83    | 83    | 83    |



Product data sheet

LC1F630F7


|          | G1 3P | G1 4P | G2 3P | G2 4P | G3 3P            | G3 4P            | G4 3P | G4 4P | G5 3P | G5 4P |
|----------|-------|-------|-------|-------|------------------|------------------|-------|-------|-------|-------|
| LA9 FL4H | 180   | 240   | 96    | 96    | 14               | g <sup>(8)</sup> | 60    | 83    | 74    | 74    |
| LA9 FJ4J | 80    | 80    | 80    | 80    | 0                | 0                | 83    | 83    | 83    | 83    |
| LA9 FK4J | 80    | 140   | 80    | 80    | 0                | 0                | 83    | 83    | 83    | 83    |
| LA9 FL4J | 180   | 240   | 80    | 80    | g <sup>(8)</sup> | g <sup>(8)</sup> | 83    | 83    | 74    | 74    |
| LA9 FK4K | 80    | 140   | 80    | 140   | 0                | 0                | 83    | 83    | 83    | 83    |
| LA9 FL4K | 180   | 240   | 80    | 140   | g <sup>(8)</sup> | g <sup>(8)</sup> | 83    | 83    | 74    | 74    |
| LA9 FL4L | 180   | 240   | 180   | 240   | 0                | 0                | 74    | 74    | 74    | 74    |


|          | H min. | H max. | H1 min. | H1 max. | J1 3P | J1 4P | J2 3P | J2 4P |
|----------|--------|--------|---------|---------|-------|-------|-------|-------|
| LA9 FH4H | 250    | 380    | 130     | 260     | 157.5 | 181.5 | 157.5 | 181.5 |
| LA9 FJ4H | 260    | 380    | 110     | 230     | 144.5 | 192.5 | 157.5 | 181.5 |
| LA9 FK4H | 280    | 380    | 130     | 230     | 164.5 | 219.5 | 157.5 | 181.5 |
| LA9 FL4H | 330    | 380    | 170     | 220     | 248.5 | 328.5 | 157.5 | 181.5 |
| LA9 FJ4J | 260    | 380    | 60      | 200     | 144.5 | 192.5 | 144.5 | 192.5 |
| LA9 FK4J | 280    | 380    | 100     | 200     | 164.5 | 219.5 | 144.5 | 192.5 |
| LA9 FL4J | 325    | 380    | 140     | 195     | 248.5 | 329.5 | 144.5 | 192.5 |
| LA9 FK4K | 300    | 380    | 120     | 200     | 164.5 | 329.5 | 164.5 | 219.5 |
| LA9 FL4K | 345    | 380    | 160     | 195     | 248.5 | 328.5 | 164.5 | 219.5 |
| LA9 FL4L | 380    | 380    | 200     | 200     | 248.5 | 328.5 | 248.5 | 328.5 |


Connections and Schema


Connections and Schema


2, 3, and 4-pole Contactors





LC1 F115 to F630, F1250(coil LX1 F )



LC1 F115 to F630 , F1250 (coil LX4 F )

LC1 F115 to F265 (coil LX9 F )

LC1 F800 (coil LX8 F  / )