

Variable speed drive, Altivar Process ATV900, ATV930, 132 kW, 380...480 V, with braking unit, IP20

ATV930C13N4

# Main

| Altivar Process ATV900   |  |
|--|--|
| Allival P100ess A1 v900  |  |
| Industrial application   |  |
| Variable speed drive   |  |
| Synchronous motors Asynchronous motors   |  |
| Process for industrial   |  |
| Standard version With braking chopper  |  |
| 3 phases<br>Single phase   |  |
| Wall mount   |  |
| Ethernet IP/Modbus TCP<br>Modbus   |  |
| 380480 V - 1510 %  |  |
| 250 A at 4 kHz for normal duty<br>211 A at 4 kHz for heavy duty  |  |
| Integrated With EMC plate option   |  |
| IP21   |  |
| UL type 1  |  |
| Slot A: communication module for Profibus DP V1 Slot A: communication module for PROFINET Slot A: communication module for DeviceNet Slot A: communication module for EtherCAT Slot A: communication module for CANopen daisy chain RJ45 Slot A: communication module for CANopen SUB-D 9 Slot A: communication module for CANopen screw terminals Slot A/slot B/slot C: digital and analog I/O extension module Slot A/slot B/slot C: output relay extension module Slot B: 5/12 V digital encoder interface module Slot B: analog encoder interface module Slot B: resolver encoder interface module |  |
| 132.0 kW for normal duty<br>110.0 kW for heavy duty  |  |
| Constant torque standard<br>Variable torque standard<br>Optimized torque mode  |  |
| Permanent magnet motor<br>Synchronous reluctance motor   |  |
| 599 Hz   |  |
| 18 kHz adjustable  |  |
|  |  |

| Nominal switching frequency | 2.5 kHz                             |
|-----------------------------|-------------------------------------|
| Line current                | 237.0 A at 380 V (normal duty)      |
|                             | 201.0 A at 380 V (heavy duty)       |
|                             | 213.0 A at 480 V (normal duty)      |
|                             | 165.0 A at 480 V (heavy duty)       |
| Apparent power              | 161.4 kVA at 380480 V (normal duty) |
|                             | 121.8 kVA at 380480 V (heavy duty)  |
| Maximum transient current   | 300 A during 60 s (normal duty)     |
|                             | 317 A during 60 s (heavy duty)      |
| Network frequency           | 5060 Hz                             |
| Prospective line Isc        | 50 kA                               |

# Complementary

| Complementary  |  |  |
|--|--|--|
| Discrete input number                                | 10   |  |
| Relay output type                                    | Configurable relay logic R1: fault relay NO/NC electrical durability 100000 cycles Configurable relay logic R2: sequence relay NO electrical durability 1000000 cycles Configurable relay logic R3: sequence relay NO electrical durability 1000000 cycles |  |
| Physical interface                                   | Ethernet<br>2-wire RS 485  |  |
| Connector type                                       | 2 RJ45<br>1 RJ45   |  |
| Method of access                                     | Slave Modbus TCP   |  |
| Transmission rate                                    | 10, 100 Mbits<br>4.8 kbps<br>9600 bit/s<br>19200 bit/s   |  |
| Transmission frame                                   | RTU  |  |
| Number of addresses                                  | 1247   |  |
| Data format  | 8 bits, configurable odd, even or no parity  |  |
| Type of polarization                                 | No impedance   |  |
| 4 quadrant operation possible                        | True   |  |
| Acceleration and deceleration ramps                  | Linear adjustable separately from 0.019999 s<br>S, U or customized   |  |
| Motor slip compensation                              | Adjustable Automatic whatever the load Can be suppressed Not available in permanent magnet motor law   |  |
| Braking to standstill                                | By DC injection  |  |
| Brake chopper integrated                             | True   |  |
| Maximum input current                                | 237.0 A  |  |
| Maximum output voltage                               | 480.0 V  |  |
| Relative symmetric network frequency tolerance       | 5 %  |  |
| Base load current at high overload                   | 211.0 A  |  |
| Base load current at low overload                    | 250.0 A  |  |
| With safety function Safely<br>Limited Speed (SLS)   | True   |  |
| With safety function Safe brake management (SBC/SBT) | True   |  |
| With safety function Safe<br>Operating Stop (SOS)    | False  |  |
| With safety function Safe Position (SP)              | False  |  |

| With safety function Safe programmable logic          | False   |
|---|---|
| With safety function Safe Speed Monitor (SSM)         | False   |
| With safety function Safe Stop 1 (SS1)                | True  |
| With sft fct Safe Stop 2 (SS2)                        | False   |
| With safety function Safe torque off (STO)            | True  |
| With safety function Safely<br>Limited Position (SLP) | False   |
| With safety function Safe<br>Direction (SDI)          | False   |
| Protection type                                       | Thermal protection: motor Safe torque off: motor Motor phase break: motor Thermal protection: drive Safe torque off: drive Overheating: drive Overcurrent between output phases and earth: drive Overload of output voltage: drive Short-circuit protection: drive Motor phase break: drive Overvoltages on the DC bus: drive Line supply overvoltage: drive Line supply undervoltage: drive Line supply phase loss: drive Overspeed: drive Break on the control circuit: drive |
| Quantity per set                                      | 1   |
| Width   | 320 mm  |
| Height  | 1205 mm   |
| Depth   | 393 mm  |
| Net weight  | 104 kg  |
| Electrical connection                                 | Line side: screw terminal 2 x 703 x 120 mm²/2 x AWG 2/02 x 300 kcmil DC bus: screw terminal 0.51.5 mm²/AWG 20AWG 16 Control: screw terminal 0.51.5 mm²/AWG 20AWG 16   |
| Transmission rate                                     | 10/100 Mbit/s for Ethernet IP/Modbus TCP<br>4.8, 9.6, 19.2, 38.4 kbit/s for Modbus serial   |
| Data format   | 8 bits, configurable odd, even or no parity for Modbus serial   |
| Type of polarization                                  | No impedance for Modbus serial  |
| Number of addresses                                   | 1247 for Modbus serial  |
| Local signalling                                      | Local diagnostic: 3 LEDs (mono/dual colour) 5 LEDs (dual colour) 2 LEDs (dual colour) 1 LED (red)   |
| Isolation   | Between power and control terminals   |
| Environment   |   |
| Operating position                                    | Vertical +/- 10 degree  |
| Product certifications                                | UL<br>CSA<br>TÜV  |
| -   |   |

| Standards  | UL 508C<br>IEC 61800-3<br>IEC 61800-5-1<br>IEC 61000-3-12<br>IEC 60721-3<br>IEC 61508<br>IEC 13849-1   |  |
|--|--|--|
| Maximum THDI   | <48 % full load conforming to IEC 61000-3-12   |  |
| Assembly style   | Enclosed   |  |
| Electromagnetic compatibility                                    | Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 |  |
| Environmental class (during operation)                           | Class 3C3 according to IEC 60721-3-3<br>Class 3S3 according to IEC 60721-3-3   |  |
| Maximum acceleration under shock impact (during operation)       | 150 m/s² at 11 ms  |  |
| Maximum acceleration under vibrational stress (during operation) | 10 m/s² at 13200 Hz  |  |
| Maximum deflection under vibratory load (during operation)       | 1.5 mm at 213 Hz   |  |
| Permitted relative humidity (during operation)                   | Class 3K5 according to EN 60721-3  |  |
| Overvoltage category   | III  |  |
| Regulation loop  | Adjustable PID regulator   |  |
| Insulation resistance  | > 1 MOhm 500 V DC for 1 minute to earth  |  |
| Noise level  | 69.9 dB conforming to 86/188/EEC   |  |
| Vibration resistance   | 1.5 mm peak to peak (f= 213 Hz) conforming to IEC 60068-2-6<br>1 gn (f= 13200 Hz) conforming to IEC 60068-2-6  |  |
| Shock resistance   | 6 gn for 11 ms conforming to IEC 60068-2-27  |  |
| Environmental characteristic                                     | Chemical pollution resistance class 3C3 conforming to IEC 60721-3-3  Dust pollution resistance class 3S3 conforming to IEC 60721-3-3   |  |
| Relative humidity  | 595 % without condensation conforming to IEC 60068-2-3   |  |
| Ambient air temperature for operation                            | -1550 °C (without derating) 5060 °C (with derating factor)   |  |
| Noise level  | 69.9 dB  |  |
| pollution degree   | 2  |  |
| Ambient air transport temperature                                | -2570 °C   |  |
| Ambient air temperature for storage                              | -2570 °C   |  |
| Packing Units  |  |  |
| Unit Type of Package 1   | PCE  |  |
| Number of Units in Package 1                                     | 1  |  |
| Package 1 Height   | 70.000 cm  |  |
| Package 1 Width  | 48.000 cm  |  |
| Package 1 Length   | 145.000 cm   |  |

128.000 kg

Package 1 Weight



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability >

| ☑ Environmental footprint                             |                               |
|---|-------------------------------|
| Carbon footprint (kg.eq.CO2 per CR, Total Life cycle) | 90833                         |
| Environmental Disclosure                              | Product Environmental Profile |

#### **Use Better**

| EU RoHS Directive                                  | Pro-active compliance (Product out of EU RoHS legal scope) |
|--|--|
| REACh Regulation                                   | REACh Declaration  |
| China RoHS Regulation                              | China RoHS declaration                                     |
|  |  |
| Product contributes to saved and avoided emissions | Yes  |


#### **Use Again**

| ○ Repack and remanufacture |   |
|----------------------------|---|
| Circularity Profile        | End of Life Information   |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| Take-back                  | No  |

# **Dimensions Drawings**

#### **Dimensions**


#### Front and Side Views

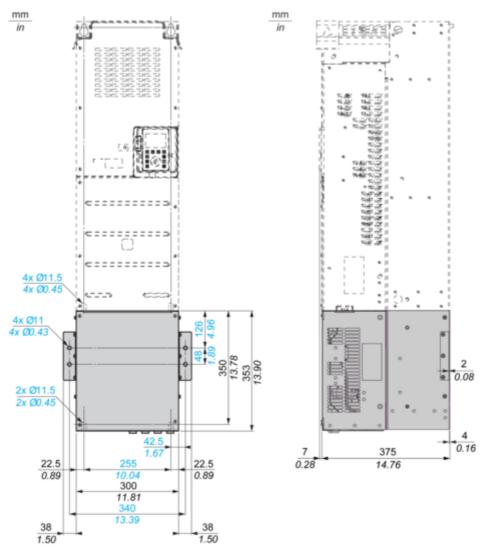

# Mounting and Clearance

# **Dimensions**

# Front and Side Views

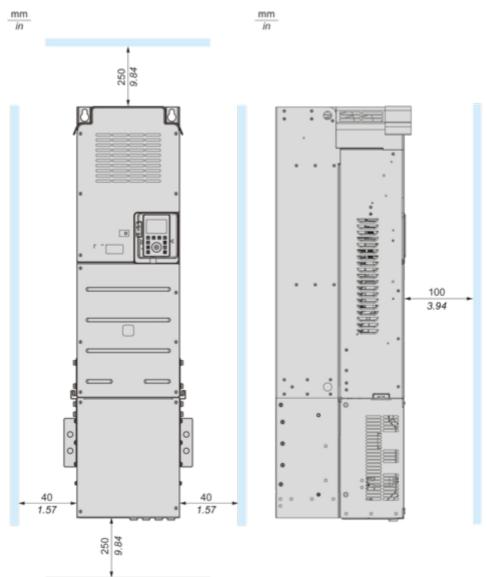

11 Mar 2025

# Connections and Schema

# **Standard Connection Diagram**

