Disclaimer. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications



variable speed drive, Easy Altivar 610, 45kW, 60hp, 380 to 460V, IP20

ATV610D45N4

Main

| IVIAIII | | |
|------------------------------------|---|--|
| Range of product | Easy Altivar 610 | |
| Product or component type | Variable speed drive | |
| Product specific application | Fan, pump, compressor, conveyor | |
| Device short name | ATV610 | |
| Variant | Standard version | |
| Product destination | Asynchronous motors Synchronous motors | |
| Mounting mode | Cabinet mount | |
| EMC filter | Integrated conforming to IEC 61800-3 category C3 with 50 m | |
| IP degree of protection | IP20 | |
| type of cooling | Forced convection | |
| Supply frequency | 5060 Hz +/-5 % | |
| Network number of phases | 3 phases | |
| [Us] rated supply voltage | 380460 V - 1510 % | |
| Motor power kW | 45 kW for normal duty 37 kW for heavy duty | |
| Motor power hp | 60 hp for normal duty 50 hp for heavy duty | |
| Line current | 92.9 A at 380 V (normal duty) 82.7 A at 460 V (normal duty) 80.5 A at 380 V (heavy duty) 69.6 A at 460 V (heavy duty) | |
| Prospective line Isc | 22 kA | |
| Apparent power | 65.9 kVA at 460 V (normal duty) 55.4 kVA at 460 V (heavy duty) | |
| Continuous output current | 88 A at 4 kHz for normal duty 75 A at 4 kHz for heavy duty | |
| Maximum transient current | 97 A during 60 s (normal duty) 112 A during 60 s (heavy duty) | |
| Asynchronous motor control profile | Optimized torque mode Constant torque standard Variable torque standard | |
| Output frequency | 0.1500 Hz | |
| Nominal switching frequency | 4 kHz | |
| Switching frequency | 212 kHz adjustable | |
| number of preset speeds | 16 preset speeds | |

| Communication port protocol | Modbus serial |
|-----------------------------|---|
| Option card | Slot A: communication card, Profibus DP V1 Slot A: digital or analog I/O extension card Slot A: relay output card |

Complementary

| Complementary | | |
|-------------------------------|--|--|
| Output voltage | <= power supply voltage | |
| Motor slip compensation | Automatic whatever the load | |
| | Adjustable | |
| | Not available in permanent magnet motor law | |
| | Can be suppressed | |
| Acceleration and deceleration | Linear adjustable separately from 0.01 to 9000 s | |
| ramps | S, U or customized | |
| Braking to standstill | By DC injection | |
| Protection type | Thermal protection: motor | |
| | Motor phase break: motor | |
| | Thermal protection: drive | |
| | Overheating: drive | |
| | Overcurrent between output phases and earth: drive | |
| | Overload of output voltage: drive | |
| | Short-circuit protection: drive | |
| | Motor phase break: drive | |
| | Overvoltages on the DC bus: drive | |
| | Line supply overvoltage: drive | |
| | Line supply undervoltage: drive | |
| | Line supply phase loss: drive | |
| | Overspeed: drive | |
| | Break on the control circuit: drive | |
| Frequency resolution | Display unit: 0.1 Hz | |
| | Analog input: 0.012/50 Hz | |
| Electrical connection | Control, screw terminal: 0.51.5 mm ² | |
| | Line side, screw terminal: 3550 mm² | |
| | Motor, screw terminal: 50 mm² | |
| | · | |
| Connector type | 1 RJ45 (on the remote graphic terminal) for Modbus serial | |
| Physical interface | 2-wire RS 485 for Modbus serial | |
| Transmission frame | RTU for Modbus serial | |
| Transmission rate | 4.8, 9.6, 19.2, 38.4 kbit/s for Modbus serial | |
| Type of polarization | No impedance for Modbus serial | |
| Number of addresses | 1247 for Modbus serial | |
| Method of access | Slave | |
| Supply | External supply for digital inputs: 24 V DC (1930 V), <1.25 mA, protection type: | |
| | overload and short-circuit protection | |
| | Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC +/- 5 %, <10 | |
| | mA, protection type: overload and short-circuit protection | |
| Local signalling | 2 LEDs for local diagnostic | |
| | 1 LED (yellow) for embedded communication status | |
| | 2 LEDs (dual colour) for communication module status | |
| | 1 LED (red) for presence of voltage | |
| Width | 226 mm | |
| | | |
| Height | 613 mm | |
| | 706 mm with EMC plate | |
| Depth | 271 mm | |
| Net weight | 25.5 kg | |
| Analogue input number | 2 | |
| Analogue input number | 3 | |

| Analogue input type | Al1, Al2, Al3 software-configurable voltage: 010 V DC, impedance: 30 kOhm, resolution 12 bits | |
|---------------------------|---|--|
| | Al1, Al2, Al3 software-configurable current: 020 mA, impedance: 250 Ohm, resolution 12 bits | |
| | Al2, Al3 software-configurable temperature probe or water level sensor | |
| Discrete input number | 6 | |
| Discrete input type | DI1DI6 programmable as logic input, 24 V DC (<= 30 V), impedance: 3.5 kOhm DI5, DI6 programmable as pulse input: 030 kHz, 24 V DC (<= 30 V) | |
| Input compatibility | DI1DI6: logic input level 1 PLC conforming to IEC 61131-2 DI5, DI6: pulse input level 1 PLC conforming to IEC 65A-68 | |
| Discrete input logic | Positive logic (source): DI1DI6 configurable logic input, < 5 V (state 0), > 11 V (state 1) Negative logic (sink): DI1DI6 configurable logic input, > 16 V (state 0), < 10 V (state 1) Positive logic (source): DI5, DI6 configurable pulse input, < 0.6 V (state 0), > 2.5 V | |
| Analogue output number | (state 1) 2 | |
| Analogue output type | Software-configurable current AQ1, AQ2: 020 mA, resolution 10 bits Software-configurable voltage AQ1, AQ2: 010 V DC impedance 470 Ohm, resolution 10 bits | |
| Sampling duration | 5 ms +/- 0.1 ms (Al1, Al2, Al3) - analog input 2 ms +/- 0.5 ms (Dl1Dl6)configurable - discrete input 5 ms +/- 1 ms (Dl5, Dl6)configurable - pulse input 10 ms +/- 1 ms (AQ1, AQ2) - analog output | |
| Accuracy | +/- 0.6 % Al1, Al2, Al3 for a temperature variation 60 °C analog input +/- 1 % AQ1, AQ2 for a temperature variation 60 °C analog output | |
| Linearity error | Al1, Al2, Al3: +/- 0.15 % of maximum value for analog input AQ1, AQ2: +/- 0.2 % for analog output | |
| Relay output number | 3 | |
| Relay output type | Configurable relay logic R1: fault relay NO/NC electrical durability 100000 cycles Configurable relay logic R2: sequence relay NO electrical durability 100000 cycles Configurable relay logic R3: sequence relay NO electrical durability 100000 cycles | |
| Refresh time | Relay output (R1, R2, R3): 5 ms (+/- 0.5 ms) | |
| Minimum switching current | Relay output R1, R2, R3: 5 mA at 24 V DC | |
| Maximum switching current | Relay output R1, R2, R3 on resistive load, cos phi = 1: 3 A at 250 V AC Relay output R1, R2, R3 on resistive load, cos phi = 1: 3 A at 30 V DC Relay output R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC Relay output R1, R2, R3 on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC | |
| Isolation | Between power and control terminals | |
| Insulation resistance | > 1 MOhm 500 V DC for 1 minute to earth | |
| Environment | | |
| Noise level | 75 dB conforming to 86/188/EEC | |
| Power dissipation in W | 1000 W(forced convection) at 380 V, switching frequency 4 kHz 121 W(natural convection) at 380 V, switching frequency 4 kHz | |
| Volume of cooling air | 240 m3/h | |
| Operating position | Vertical +/- 10 degree | |

| Noise level | 75 dB conforming to 86/188/EEC | |
|-------------------------------|--|--|
| Power dissipation in W | 1000 W(forced convection) at 380 V, switching frequency 4 kHz 121 W(natural convection) at 380 V, switching frequency 4 kHz | |
| Volume of cooling air | 240 m3/h | |
| Operating position | Vertical +/- 10 degree | |
| Electromagnetic compatibility | Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6 | |
| Pollution degree | 2 conforming to IEC 61800-5-1 | |

| Vibration resistance | 1.5 mm peak to peak (f= 213 Hz) conforming to IEC 60068-2-6 1 gn (f= 13200 Hz) conforming to IEC 60068-2-6 | |
|---------------------------------------|--|--|
| Shock resistance | 15 gn for 11 ms conforming to IEC 60068-2-27 | |
| Relative humidity | 595 % without condensation conforming to IEC 60068-2-3 | |
| Ambient air temperature for operation | -1545 °C (without derating) 4560 °C (with derating factor) | |
| Ambient air temperature for storage | -4070 °C | |
| Operating altitude | <= 1000 m without derating 10004800 m with current derating 1 % per 100 m | |
| Environmental characteristic | Chemical pollution resistance class 3C3 conforming to IEC 60721-3-3 Dust pollution resistance class 3S3 conforming to IEC 60721-3-3 | |
| Standards | IEC 61800-3 Environment 2 category C3 IEC 61800-3 IEC 61800-5-1 IEC 60721-3 | |
| Marking | CE | |

Packing Units

| Unit Type of Package 1 | PCE |
|------------------------------|-----------|
| Number of Units in Package 1 | 1 |
| Package 1 Height | 34.000 cm |
| Package 1 Width | 52.000 cm |
| Package 1 Length | 73.000 cm |
| Package 1 Weight | 30.200 kg |



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

| ∇ Environmental footprint | |
|---|-------------------------------|
| Carbon footprint (kg.eq.CO2 per CR, Total Life cycle) | 80864 |
| Environmental Disclosure | Product Environmental Profile |

Use Better

| Materials and Substances | |
|--|------------------------|
| Packaging made with recycled cardboard | No |
| Packaging without single use plastic | No |
| China RoHS Regulation | China RoHS declaration |
| ∜ Energy efficiency | |
| Product contributes to saved and avoided emissions | Yes |

Use Longer

| ☼ Lifetime extension | | |
|----------------------|-----|--|
| Upgradeability | Yes | |

Use Again


| ○ Repack and remanufacture | |
|----------------------------|-------------------------|
| Circularity Profile | End of Life Information |
| Take-back | No |

ATV610D45N4

Dimensions Drawings

Dimensions

IP20 Drives

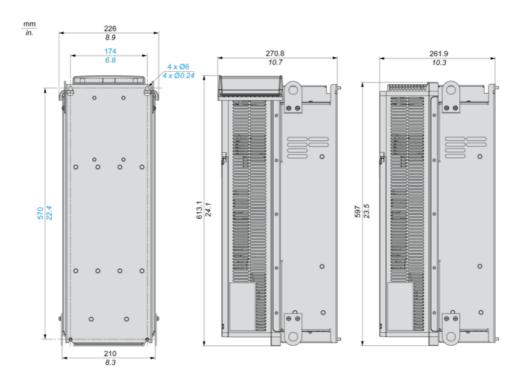


Drawings from left to right: rear view, right side view with top cover, right side view without top cover.

IP20 Drives With EMC Plate

Product datasheet


ATV610D45N4

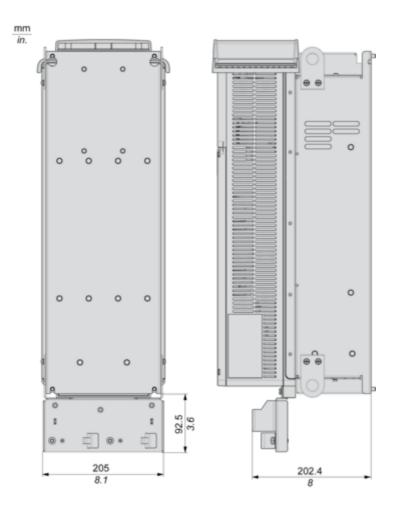

Drawings from left to right: rear view, right side view with top cover.

Mounting and Clearance

Clearances

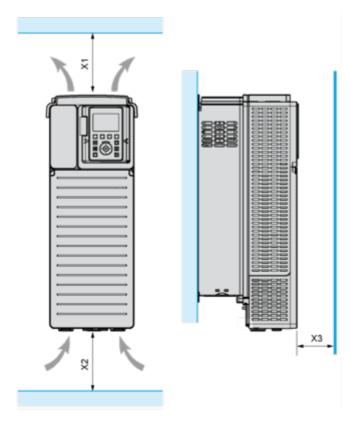


| X1 | X2 | X3 |
|---------------------|---------------------|--------------------|
| ≥ 100 mm (3.94 in.) | ≥ 100 mm (3.94 in.) | ≥ 10 mm (0.39 in.) |

- $_{\bullet}$ Mount the device in a vertical position (±10°). This is required for cooling the device.
- Do not mount the device close to heat sources.
- Leave sufficient free space so that the air required for cooling purposes can circulate from the bottom to the top of the drive.


Mounting Types

Mounting Type A: Individual IP21

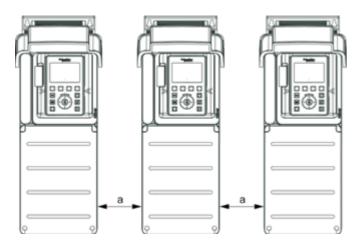


a ≥ = 110 mm (4.33 in.)

Mounting Type B: Side by Side IP20 (Possible, 2 Drives Only)

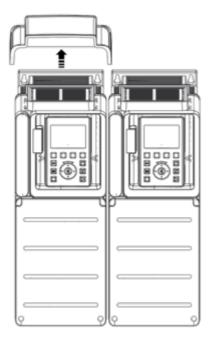

Mounting Type C: Individual IP20

ATV610D45N4

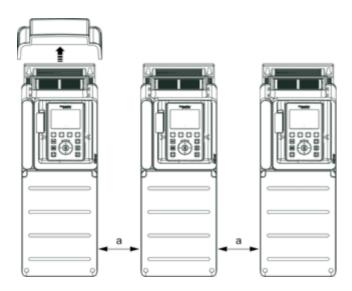


a ≥ = 110 mm (4.33 in.)

ATV610D45N4

Connections and Schema

Single or Three-phase Power Supply - Diagram With Line Contactor

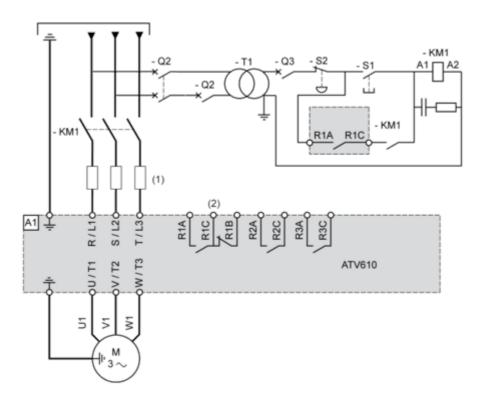

(1) Line chokes


(2) See control block wiring diagram

A1 : Drive

KM1 : Line Contactor Q2, Q3 : Circuit breakers S1, S2 : Pushbuttons

T1: Transformer for control part

Control Block Wiring Diagram

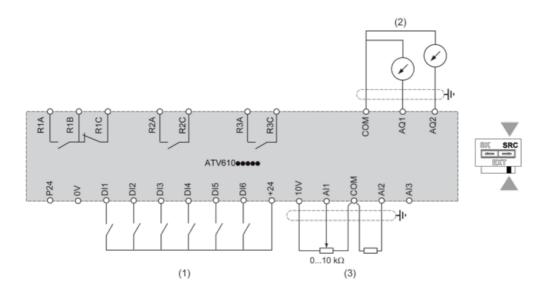


(1) Digital Input (2) Analog Output

(3) Analog Input

R1A, R1B, R1C : Fault relay output R2A, R2C : Sequence relay output R3A, R3C : Sequence relay output

Sensor Connection

It is possible to connect either 1 or 3 sensors on terminals Al2 or Al3.




Product datasheet

ATV610D45N4

Performance Curves

Derating Curves

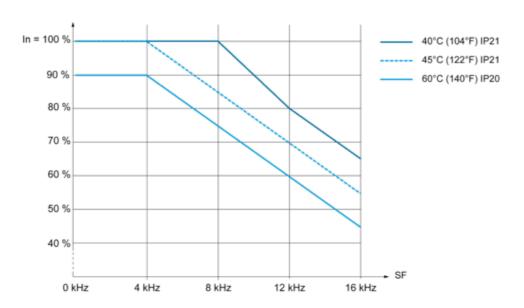

In: Nominal Drive Current SF: Switching Frequency