Specifications



soft starter-ATS22-control 220Vpower 230V(22kW)/ 400...440V(45kW)

ATS22D88Q

Main

Range of productAltistart 22Product or component typeSoft starterProduct destinationAsynchronous motorsProduct specific applicationPumps and fansComponent nameATS22Network number of phases3 phases[Us] rated supply voltage230440 V - 1510 %Motor power kW22 kW 230 V 45 kW 440 VFactory setting current81 APower dissipation in W66 W for standard applicationsUtilisation categoryAC-53A	
Product destinationAsynchronous motorsProduct specific applicationPumps and fansComponent nameATS22Network number of phases3 phases[Us] rated supply voltage230440 V - 1510 %Motor power kW22 kW 230 V 45 kW 400 V 45 kW 440 VFactory setting current81 APower dissipation in W66 W for standard applications	
Product specific application Pumps and fans Component name ATS22 Network number of phases 3 phases [Us] rated supply voltage 230440 V - 1510 % Motor power kW 22 kW 230 V 45 kW 400 V 45 kW 440 V Factory setting current 81 A Power dissipation in W 66 W for standard applications	
Component name ATS22 Network number of phases 3 phases [Us] rated supply voltage 230440 V - 1510 % Motor power kW 22 kW 230 V 45 kW 400 V 45 kW 440 V Factory setting current 81 A Power dissipation in W 66 W for standard applications	
Network number of phases 3 phases [Us] rated supply voltage 230440 V - 1510 % Motor power kW 22 kW 230 V 45 kW 400 V 45 kW 440 V Factory setting current 81 A Power dissipation in W 66 W for standard applications	
[Us] rated supply voltage 230440 V - 1510 % Motor power kW 22 kW 230 V 45 kW 400 V 45 kW 440 V Factory setting current 81 A Power dissipation in W 66 W for standard applications	
Motor power kW 22 kW 230 V 45 kW 400 V 45 kW 440 V Factory setting current 81 A Power dissipation in W 66 W for standard applications	
45 kW 400 V 45 kW 440 V Factory setting current 81 A Power dissipation in W 66 W for standard applications	
Power dissipation in W 66 W for standard applications	
Utilisation category AC-53A	
Type of start Start with torque control (current limited to 3.5 ln)	
IcL starter rating 88 A for connection in the motor supply line for standard applications	S
IP degree of protection IP20	

Complementary

Assembly style	With heat sink
Function available	Internal bypass
Supply voltage limits	195484 V
Supply frequency	5060 Hz - 1010 %
Network frequency	4566 Hz
Device connection	To the motor delta terminals In the motor supply line
[Uc] control circuit voltage	230 V - 1510 % 50/60 Hz
Control circuit consumption	20 W
Discrete output number	2
Discrete output type	Relay outputs R1 230 V running, alarm, trip, stopped, not stopped, starting, ready C/ O Relay outputs R2 230 V running, alarm, trip, stopped, not stopped, starting, ready C/ O
Minimum switching current	100 mA at 12 V DC (relay outputs)

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Maximum switching current	5 A 250 V AC resistive 1 relay outputs 5 A 30 V DC resistive 1 relay outputs 2 A 250 V AC inductive 0.4 20 ms relay outputs 2 A 30 V DC inductive 7 ms relay outputs
Discrete input number	3
Discrete input type	(LI1, LI2, LI3) logic, 5 mA 4.3 kOhm
Discrete input voltage	24 V <= 30 V
Discrete input logic	Positive logic LI1, LI2, LI3 at State 0: < 5 V and <= 2 mA at State 1: > 11 V, >= 5 mA
Output current	0.41 Icl adjustable
PTC probe input	750 Ohm
Communication port protocol	Modbus
Connector type	1 RJ45
Communication data link	Serial
Physical interface	RS485 multidrop
Transmission rate	4800, 9600 or 19200 bps
Installed device	31
Protection type	Phase failure: line Thermal protection: motor Thermal protection: starter
Marking	CE
type of cooling	Forced convection
Operating position	Vertical +/- 10 degree
Height	295 mm
Width	145 mm
Depth	207 mm
Net weight	12 kg
Motor power range AC-3	1525 kW at 200240 V 3 phases 3050 kW at 380440 V 3 phases
Motor starter type	Soft starter

Environment

Electromagnetic compatibility	Conducted and radiated emissions level A conforming to IEC 60947-4-2 Damped oscillating waves level 3 conforming to IEC 61000-4-12 Electrostatic discharge level 3 conforming to IEC 61000-4-2 Immunity to electrical transients level 4 conforming to IEC 61000-4-4 Immunity to radiated radio-electrical interference level 3 conforming to IEC 61000-4-3 Voltage/current impulse level 3 conforming to IEC 61000-4-5	
Standards	IEC 60947-4-2	
Product certifications	CCC CSA UL GOST C-Tick	
Vibration resistance	1 gn (f= 13200 Hz) conforming to IEC 60068-2-6 1.5 mm (f= 213 Hz) conforming to IEC 60068-2-6	
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27	
Noise level	45 dB	
Pollution degree	Level 2 conforming to IEC 60664-1	
Relative humidity	095 % without condensation or dripping water conforming to IEC 60068-2-3	

Ambient air temperature for operation	-1040 °C (without derating) 4060 °C (with current derating 2.2 % per °C)
Ambient air temperature for storage	-2570 °C
Operating altitude	<= 1000 m without derating > 1000< 2000 m with current derating of 2.2 % per additional 100 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	23.000 cm
Package 1 Width	30.800 cm
Package 1 Length	35.800 cm
Package 1 Weight	8.170 kg
Unit Type of Package 2	P06
Number of Units in Package 2	6
Package 2 Height	75.000 cm
Package 2 Width	60.000 cm
Package 2 Length	80.000 cm
Package 2 Weight	63.184 kg

Contractual warranty

Warranty

18 months

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability \geq

Use Better

Materials and Substances			
Packaging made with recycled cardboard	No		
Packaging without single use plastic	No		
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
SCIP Number	7f28cbce-306d-4c94-ba04-b506c5522d63		
REACh Regulation	REACh Declaration		

Use Again


${\mathbb O}$ Repack and remanufacture	
Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Frame Size B

Dimensions

<u>mm</u> *in*.

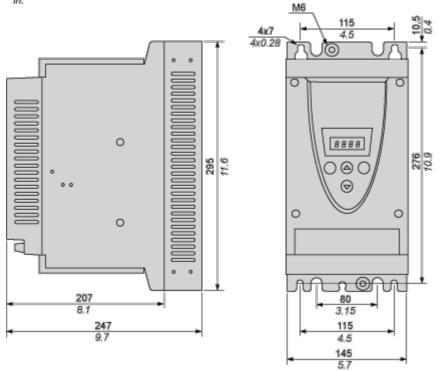

ATS22D88Q

Mounting and Clearance

Precautions

Standards

The Altistart 22 soft starter is compliant with pollution Degree 2 as defined in NEMA ICS1-1 or IEC 60664-1. For environment pollution degree 3, install the Altistart 22 soft starter inside a cabinet type 12 or IP54.

DANGER

HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH


ATS22 soft starters are open devices and must be mounted in a suitable enclosure.

Failure to follow these instructions will result in death or serious injury.

Air Circulation

Leave sufficient free space to help the air required for cooling purposes to circulate from the bottom to the top of the unit.

mm

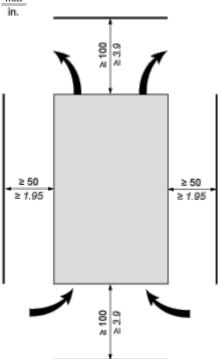


Overheating

To avoid the soft starter to overheat, respect the following recommendations:

- Mount the Altistart 22 Soft Starter within ± 10° of vertical.
- Do not locate the Altistart 22 Soft Starter near heat radiating elements.
- Electrical current through the Altistart 22 Soft Starter will result in heat losses that must be dissipated into the ambient air immediately surrounding the soft starter. To help prevent a thermal fault, provide sufficient enclosure cooling and/or ventilation to limit the ambient temperature around the soft starter.
- If several soft starters are installed in a control panel, arrange them in a row. Do not stack soft starters. Heat generated from the bottom soft starter can adversely affect the ambient temperature around the top soft starter.

Mounting

Connection Between the Fan and the Altistart 22 Soft Starter

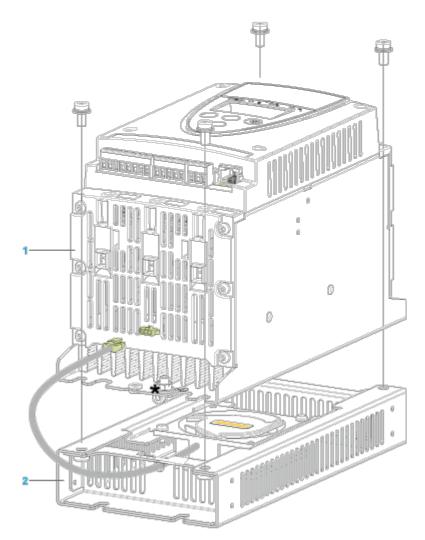

- 1 Altistart 22 Soft Starter
- 2 Fan

ATS22D88Q

Wall mounted or Floor-standing Enclosure with IP 23 Degree of protection


Introduction

To help proper air circulation in the soft starter, grilles and forced ventilation can be installed.

Ventilation Grilles




Forced Ventilation Unit




Connections and Schema

Power Terminal

Cage Style

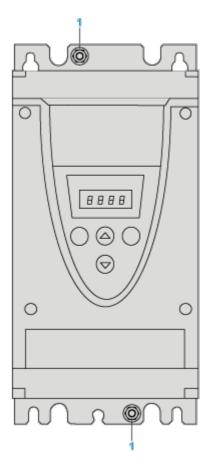

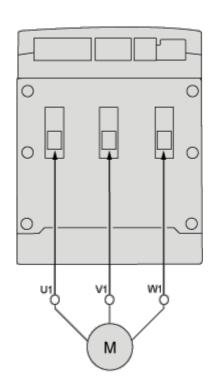

1 Ground connection

Power connections, minimum and maximum wiring capabilities, tightening torque


		IEC cable	UL cable	
Power supply and output to motor	Size/gauge	min	4 mm (a)	10 AWG (a)
		max	50 mm	1/0 AWG
	Tightening torque min max	min	8 N.m	70 lb.in
		max	8 N.m	70 lb.in
	Strip length		15 mm	0.6 in.


Power connections, minimum required wiring section

IEC cable	UL cable
mm² (Cu 70°C/158°F) (1)	AWG (Cu 75°C/167°F) (1)
35	2

230 Vac control, logic Inputs (LI) 24 Vdc, 3-wire control

With Line Contactor, Freewheel or Controlled Stop

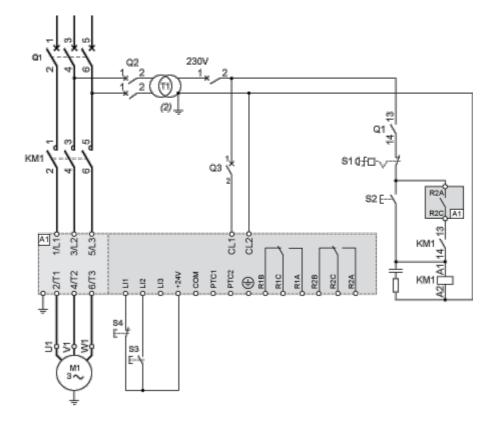

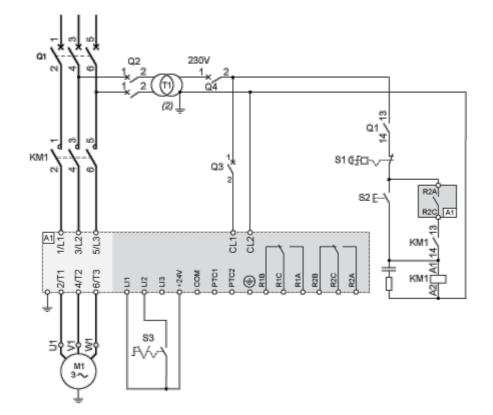


230 Vac control, logic Inputs (LI) 24 Vdc, 2-wire control, freewheel stop

Connection in the motor delta winding in series with each winding

Wiring

ATS22 soft starters connected to motors with the delta connections can be inserted in series in the motor windings. The following wiring requieres particular attention. It is documented in the Altistart 22 Soft start - soft stop unit user manual. Please contact Schneider Electric commercial organisation for further informations.

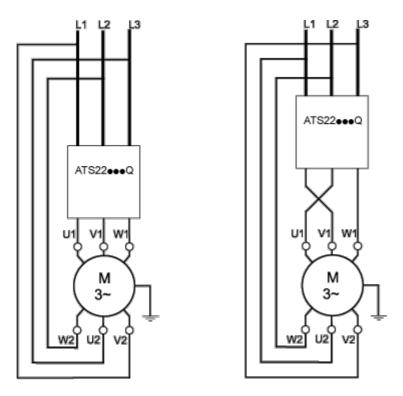


Example

A 400 V - 110 kW motor with a line current of 195 A (nominal current for the delta connection). The current in each winding is equal to 195/1.5 or 130 A. The rating is determined by selecting the soft starter with a permanent nominal current (ICL) just above this current.

Performance Curves

Motor Thermal Protection - Cold Curves

Curves

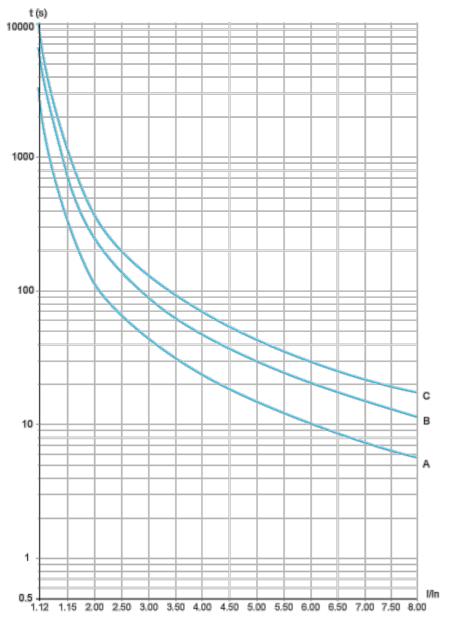

- A Class 10
- B Class 20
- C Class 30

Trip time for a Standard Application (Class 10)

3.5 ln
32 s

Trip time for a Severe Application (Class 20)

ATS22D88Q


3.5 ln
63 s

Trip time for a Severe Application (Class 30)

3.5 ln
95 s

Motor Thermal Protection - Warm Curves

Curves

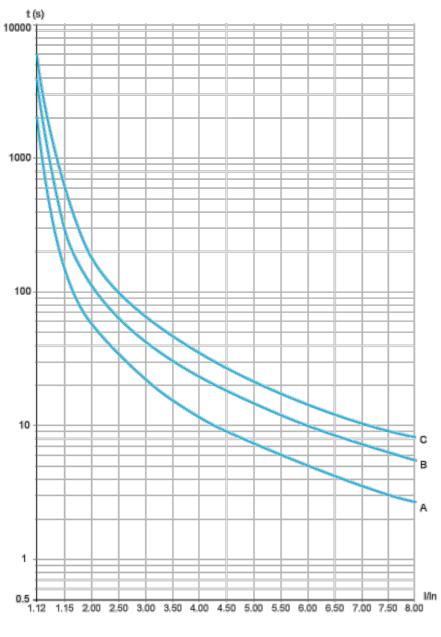

- A Class 10
- B Class 20
- C Class 30

Trip time for a Standard Application (Class 10)

3.5 ln 16 s

Trip time for a Severe Application (Class 20)

3.5 ln



Trip time for a Severe Application (Class 30)

3.5 ln
48 s