

Product datasheet

Specifications



soft starter for asynchronous motor, Altistart 48, 35A, 230 to 415V, 7.5 to 30kW

ATS48D38Q

! Discontinued - Service only

! Discontinued on: 31-Dec-2023

! To be end-of-service on: 31-Dec-2030

Main

| | |
|------------------------------|--|
| Range of product | Altistart 48 |
| Product or component type | Soft starter |
| Product destination | Asynchronous motors |
| Product specific application | Heavy duty industry and pumps |
| Device short name | ATS48 |
| Utilisation category | AC-53A |
| Ue power supply voltage | 230...415 V - 15...10 % |
| power supply frequency | 50...60 Hz - 5...5 % |
| Motor power kW | 7.5 kW at 230 V connection in the motor supply line for severe applications 9 kW at 230 V connection in the motor supply line for standard applications 15 kW at 230 V connection to the motor delta terminals for severe applications 15 kW at 400 V connection in the motor supply line for severe applications 18.5 kW at 230 V connection to the motor delta terminals for standard applications 18.5 kW at 400 V connection in the motor supply line for standard applications 22 kW at 400 V connection to the motor delta terminals for severe applications 30 kW at 400 V connection to the motor delta terminals for standard applications |

Complementary

| | |
|------------------------|--|
| Device connection | To the motor delta terminals In the motor supply line |
| Protection type | Phase failure: line Thermal protection: motor Thermal protection: starter |
| Standards | IEC 60947-4-2 |
| Product certifications | UL C-Tick TCF DNV NOM 117 CSA SEPRO CCC GOST |
| Marking | CE |
| Discrete input number | 5 |
| Discrete input type | PTC, 750 Ohm at 25 °C (Stop, Run, LI3, LI4) logic, <= 8 mA 4300 Ohm |
| Discrete input logic | Positive logic Stop, Run, LI3, LI4 at State 0: < 5 V and <= 2 mA at State 1: > 11 V, >= 5 mA |

| | |
|------------------------------------|---|
| Minimum switching current | 10 mA at 6 V DC for relay outputs |
| Discrete output number | 2 |
| Discrete output type | (LO1) logic output 0 V common configurable (LO2) logic output 0 V common configurable (R1) relay outputs fault relay NO (R2) relay outputs end of starting relay NO (R3) relay outputs motor powered NO |
| Analogue output type | Current output AO: 0-20 mA or 4-20 mA, impedance <500 Ohm |
| Communication port protocol | Modbus |
| Connector type | 1 RJ45 |
| Communication data link | Serial |
| Physical interface | RS485 multidrop |
| Transmission rate | 4800, 9600 or 19200 bps |
| Function available | External bypass (optional) |
| Operating position | Vertical +/- 10 degree |
| Height | 275 mm |
| Width | 160 mm |
| Depth | 190 mm |
| Net weight | 4.9 kg |

Environment

| | |
|--|--|
| Electromagnetic compatibility | Conducted and radiated emissions level A conforming to IEC 60947-4-2 Conducted and radiated emissions level B conforming to IEC 60947-4-2 Damped oscillating waves level 3 conforming to IEC 61000-4-12 Electrostatic discharge level 3 conforming to IEC 61000-4-2 Immunity to electrical transients level 4 conforming to IEC 61000-4-4 Immunity to radiated radio-electrical interference level 3 conforming to IEC 61000-4-3 Voltage/current impulse level 3 conforming to IEC 61000-4-5 |
| Relative humidity | 0...95 % without condensation or dripping water conforming to IEC 60068-2-3 |
| Ambient air temperature for operation | 40...60 °C (with current derating of 2 % per °C) -10...40 °C (without derating) |
| Ambient air temperature for storage | -25...70 °C |
| Operating altitude | <= 1000 m without derating > 1000...2000 m with current derating of 2.2 % per additional 100 m |

Packing Units

| | |
|-------------------------------------|----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 29.0 cm |
| Package 1 Width | 26.0 cm |
| Package 1 Length | 37.0 cm |
| Package 1 Weight | 5.765 kg |
| Unit Type of Package 2 | P06 |
| Number of Units in Package 2 | 8 |
| Package 2 Height | 73.5 cm |
| Package 2 Width | 80.0 cm |
| Package 2 Length | 60.0 cm |

Package 2 Weight 59.576 kg

Contractual warranty

Warranty 18 months

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number

Fb0e016f-7168-4cf9-816d-12b428ae149a

Use Again

Repack and remanufacture


WEEE



The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

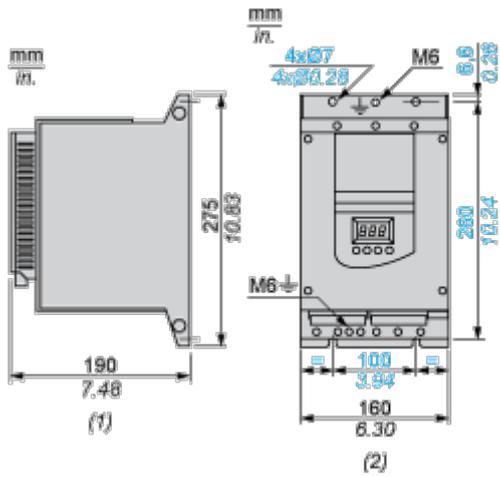

(1) Right View
(2) Front View

Mounting and Clearance

Clearance

